



The power behind competitiveness

# Delta UPS Solutions

Uninterruptible Power Supply

[www.mstechnologiesups.com](http://www.mstechnologiesups.com)

 **DELTA**  
Smarter. Greener. Together.



# Contents

Delta Group		1
About MCIS		3
Delta UPS		4
Product		6
• Amplon		
• Ultron &		
• Modulon	Application	Matrix
• Product		
• UPS	Management	
Technical	Specifications	31
UPS	Q&A	45

# Delta Group

Delta Group is the world's leading provider of power management and thermal management solutions, as well as a major source for components, visual displays, industrial automation, networking products, and renewable energy solutions. Delta Group is focused on three main businesses: power electronics, energy management, and smart green life. Delta Group has sales offices worldwide and manufacturing plants in Taiwan, China, Thailand, Japan, Mexico, India, Brazil and Europe.

As a global leader in power electronics, Delta's mission is, "To provide innovative, clean and energy-efficient solutions for a better tomorrow." Delta is committed to environmental protection and has implemented green, lead-free production and recycling and waste management programs for many years.

More information about Delta Group can be found at [www.deltaww.com](http://www.deltaww.com)



# About MCIS

With its expertise and experience in power management and energy efficiency, the Mission Critical Infrastructure Solutions (MCIS) business of Delta Electronics Inc. positions itself as: "The power behind competitiveness". MCIS plays an important role in making our customers' businesses more competitive. We fulfill this role by providing highly reliable and efficient power management products and datacenter infrastructure solutions to ensure the continuity of our customers' mission critical operations while reducing their Total Cost of Ownership (TCO). Delta MCIS is a powerful and trustworthy partner to companies that strive to outperform the competition.

With more than 15 years of experience in the UPS industry, Delta Electronics is a leading brand, featuring complete professional capacities ranging from product development, design and manufacturing for all UPS product lines. Our client base covers world class enterprises in the areas of semiconductors, optoelectronics, food processing, finance, petrochemicals and telecommunications. Additionally, our UPS solutions have been adopted extensively at major Asia events in recent years, including the World Expo 2010 Shanghai, the Guangzhou Asian Games and Universiade Shenzhen, just to name a few. Delta's UPS solutions play a critical role in power management for a number of public mega projects, including One of the major transportation system in Taiwan, that has been rated number one in reliability by Nova/CoMet five years in a row since 2004, and the recently launched Target Spacecraft in China. The most competitive companies in the world choose Delta because our products are designed to enhance competitiveness.



## Delta UPS

Our clients are most concerned about power issues such as power failure, power sag, power surge, under voltage or over voltage, frequency variation, harmonic distortion and line noise. Delta Electronics emphasizes the areas of redundant power supply, voltage regulation, equipment protection and adjustment and has designed and developed three UPS product families - Amplon, Ultron and Modulon. Their power range, applications and the equipment they protect are listed below:

Product Family	Power	Topology	Applications
Amplon	1kVA or higher	Single-Phase UPS	Server and Network Equipment
Ultron	10kVA or higher	Three-Phase On-Line UPS	Datacenter and Industrial Equipment
Modulon	20kVA or higher	Three-Phase Modular On-Line UPS	Modular unit expansion and redundant power supply can be achieved within a single rack.

Delta UPS systems feature the following:

- Leading AC-AC Efficiency
- Fully redundant design and configuration
- High input and output power factors
- Easy expansion without additional hardware
- Supports to seamless operations at low level of TCO (Total Cost of Ownership)



---

Customers can choose suitable UPS systems based on their needs to maintain seamless operations and ensure their long term competitiveness.

### Amplon Family

In the Delta UPS product line, the Amplon family are single phase UPS systems for power rating requirements above 1kVA that support medium to small network devices, security and surveillance systems and POS systems. The word Amplon (Ample + on), represents ample stability, which describes this UPS system – it maximizes space and economic benefits. Amplon systems are the perfect power management solution for small to medium enterprises, such as financial institutes, government departments and medical centers, and offer the power protection solution with the highest space and cost benefits.

### Ultron Family

In the Delta UPS product line, the Ultron family are three-phase UPS systems for power rating requirements above 10kVA that support mission critical applications including industrial equipment, datacenters, traffic control facilities, broadcast stations and backbone networks. The word Ultron (Ultra + on), signifies ultimate performance, which describes the features of this UPS system – outstanding stability and insurance for mission critical applications.

### Modulon Family

In the Delta UPS product line, the Modulon family features a three-phase modularization architecture for power rating requirements above 20kVA and supports datacenters, mid-large network equipments, data storage centers and financial balance centers. The word Modulon (Modular + on) highlights its core feature – modularization. Customers can purchase UPS systems with greater flexibility based on their initial unit needs and future needs for scalability to lower their TCO and maximize system benefits.

### UPS Management Applications and Supported NIC Cards

In addition to high efficiency and reliable UPS systems, Delta Electronics also offers the following value added services: UPSentry and InsightPowerUPS management applications. By adding supported NIC cards, customers can remotely monitor UPS operations, perform initial diagnoses on abnormal conditions and power on or off the control systems remotely when necessary.

# Delta UPS - Amplon Family



## N Series, Single Phase

1/2/3 kVA

The Amplon N series is a true online double-conversion UPS that can provide your critical equipment with reliable, stable sine wave power. It features significant advantages, including an output power factor of 0.9 and up to 93% AC-AC efficiency for greater energy savings. The Amplon N series provides a safe power supply guaranteed for mission critical applications such as work stations, POS, ATMs, medical equipment, and more.

### Features:

- True online double-conversion topology and zero transfer time to battery ensure high reliability.
- Advanced DSP (Digital Signal Processor) controller for fast computation capability and a simplified control circuit for enhanced stability.
- Wide input voltage range allows the UPS to work in harsh electrical environments.
- Generator compatibility ensures continuous and reliable power.
- High input power factor ( $> 0.99$ ) and low input harmonic distortion ( $iTHD < 3\%$ ) save upstream investment.
- Output power factor up to 0.9 presents a stronger load capacity.
- AC-AC efficiency up to 93% and high efficiency of 91% at 50% load results in marked energy cost savings.
- Compact design saves more space for critical equipment.
- Excellent local communications through LCD display
- Intelligent battery management maximizes battery performance and sustains battery life
- Mini slot and USB port enhance monitoring and manageability

### Applicable Sectors



Server



Network



Security



Medical



POS



Banking

# Delta UPS - Amplon Family



## R Series, Single Phase

1/2/3 kVA

The Amplon R series is a true on-line, double-conversion UPS that protects devices from potential power problems such as spikes, surges and brownouts. It is available in either a rack or tower configuration and is recommended for servers, VoIP, telecommunications and networking.

The Amplon R series is designed for long backup time applications with the addition of a customized battery source.

The inbuilt high level charger shortens the recharging period and increases availability.

### Applicable Sectors



Server



Telecom



Industrial



Network



VoIP



Storage



Medical

### Features:

- Double-conversion technology provides 24/7 full-time protection.
- Automatic input frequency detection.
- Additional charger board can be added for long backup applications and reduced recharging time.
- AC-start and battery-start capabilities.
- Rack or tower configuration in 2U size cabinet.
- Fulfill long backup time demand for mission critical applications.
- Remote management over network via software.
- High input power factor (pf > 0.97) saves installation cost.
- Input voltage range meets the needs of most applications and avoids frequent transfers to battery mode to help prolong battery life.



# Delta UPS - Amplon Family



## Applicable Sectors



Server



Telecom



Industrial



Network



VoIP



Storage



Medical

## RT Series, Single Phase

### 1/2/3 kVA

The Amplon RT 1-3kVA series is an online double-conversion UPS providing consistent sine-wave power to your critical equipment. It supports personal computers, networks, servers, VoIP and telecommunications. RT 1-3kVA series features an output power factor of 0.9 and best-in-class AC-AC efficiency up to 94% resulting in greater energy savings. Optional external battery pack can be connected for longer backup time to keep your applications safe and running smoothly at all times.

#### Features:

- Watch-dog design of DSP (Digital Signal Processor) increases reliability.
- Cold-start capability provides temporary battery power when the utility power is out.
- Fan failure detection alerts users to failed fans.
- Hot swappable batteries ensure continuous operation even when batteries are being replaced.
- High output power factor 0.9 provides more real power to critical loads.
- High input power factor (pf > 0.99) and low harmonic distortion (iTHD < 5%) save upstream investment.
- Up to 94% AC-AC efficiency and 97% efficiency in ECO mode results in marked energy cost savings.
- Wide input voltage range reduces the chance of using the battery and extends battery life.
- Intelligent battery management sustains battery life and performance.
- Fan speed control by load level maximizes efficiency and reduces audible noise.
- Load segment control saves battery runtime for important loads.
- Convertible rack and tower configuration in 2U size cabinet.
- Excellent local communications through rotatable LCD display
- Intelligent management software connectivity via RS232 or USB port.

# Delta UPS - Amplon Family



## RT Series, Single Phase

5/6/10 kVA

The Amplon RT series delivers double-conversion on-line technology, high power density and input power factor, and low current harmonics with its advanced architecture. Designed in a rack or tower configuration with an LCD display, Amplon RT offers advanced performance for servers, data centers, networking, VoIP and telecommunications.

The Amplon RT has 1+1 parallel redundancy function to provide higher reliability. Optional external battery pack can be added to fulfill longer backup time for mission critical applications.

### Applicable Sectors



Server



Telecom



Industrial



Network



VoIP



Storage



Medical

### Features:

- True online double-conversion topology provides 24/7 full-time protection.
- 1+1 parallel redundancy or expansion without requiring additional hardware.
- AC-start and battery-start capabilities.
- Additional charger board can be added to reduce recharging time.
- Optional maintenance bypass box for parallel redundancy with manual bypass switch.
- External charger box enhances battery charging ability.
- Rack or tower configuration.
- Multi-language LCD display with blue backlight.
- Optional external battery pack for longer backup time.
- Output factor 0.9 delivers more real power.
- High input power factor (pf > 0.99) and low harmonic distortion (iTHD < 5%).
- Common battery installation enables two UPS in parallel to share one battery source for cost savings.
- Input voltage range meets the needs of most applications and avoids frequent transfers to battery mode to help prolong battery life.

## Delta UPS - Amplon Family



### Applicable Sectors



Data Center



Network



Security



Medical



Industrial



Banking

### N Series, Single Phase

#### 6/12 kVA

The Amplon N series is a true on-line, double-conversion UPS designed for workstations, POS, ATMs, home appliances, small server rooms or production equipment.

#### Features:

- Single phase 110/220 Vac dual output power supply
- Wide input range (120V-280V)
- High overall efficiency (>88%), 94% under Eco Mode
- High input power factor (>0.99) for greater power utilization rate
- Ideal as hot-standby to increase system reliability
- Class H output isolation transformer design
- Built-in maintenance switch
- Convenient control panel and LCD indicator
- Support REPO (remote emergency power off) function
- Optional external battery to extend standby duration
- Centralized remote monitoring possible with Vista-compatible power management applications

# Delta UPS - Amplon Family



## Applicable Sectors



Server



Network



Security



Telecom



POS



Banking

## N Series, Single Phase


### 6/10 kVA

The Amplon N series 6-10kVA UPS is a single-phase on-line UPS with pioneering technology that provides output power factor up to unity and AC-AC efficiency to a maximum 95%. Its remarkably compact dimensions reserve more room for critical equipment such as workstations, POSs, ATMs, office appliances, small server rooms, and production equipment. The Amplon N series superior features include a N+X parallel redundancy function and variable fan speed control to guarantee high system availability and best Total Cost of Ownership (TCO).

#### Features:

- The smallest dimensions in its class saves significant space for more critical equipment.
- A pioneer in unity power factor (kVA=kW) to maximize power availability.
- The highest AC-AC efficiency up to 95% and efficiency of 98% in ECO mode for exceptional energy cost savings.
- Automatic speed regulation function with multi-stage fan speed control maximizes system efficiency, significantly reduces audible noise, and prolongs the service life of the fans.
- True online double-conversion topology and zero transfer time to battery ensure high reliability.
- Parallel configuration for expansion and N+X redundancy up to 4 units.
- Advanced DSP (Digital Signal Processor) controller for fast computation capabilities and a simplified control circuit for enhanced stability.
- Generator compatibility ensures continuous and reliable power.
- Excellent local communications through user-friendly LCD display and LED indicators.
- Intelligent battery management maximizes battery performance and extends battery life.
- Various types of communication interfaces enhance monitoring and manageability.

## Delta UPS – Ultron Family

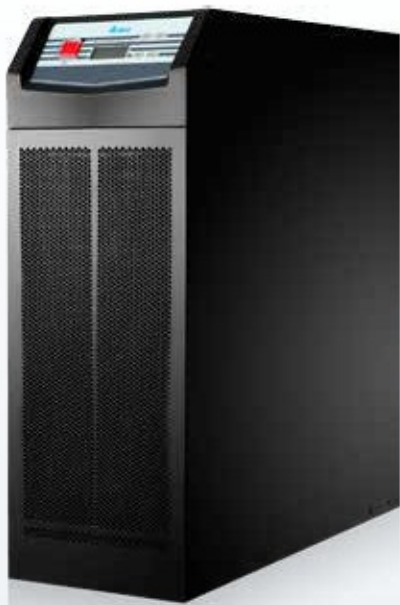

### Applicable Sectors



Data Center



Telecom



Industrial



Network



Security



Lab



Medical



Metro



Banking



Retail

### EH Series, Three Phase In - Single Phase Out 10/15/20 kVA

The Ultron EH series is an online double-conversion 3p-1p UPS which provides reliable power protection for IT rooms, telecommunications, banking, medical facilities and industry. Supported with DSP based technology, it offers rapid computation capabilities that enhance system stability and provide precise voltage to load. The Ultron EH series offers many superior features including N+X parallel redundancy and a built-in manual bypass switch to guarantee higher availability and reliability for protecting your critical loads.

#### Features:

- True online double-conversion technology to completely protect the critical load from problems occurring on the source side.
- DSP based technology to support rapid computation capability and a simplified control circuit for enhanced stability.
- Dual input design to allow different power supply sources for enhanced availability.
- Built-in manual bypass ensures continuous power to the load during maintenance.
- A wide input voltage range to reduce battery discharge probability and prolong battery life.
- ECO mode efficiency up to 96% to reduce operating cost
- Small footprint to save space.
- Parallel expansion and N+X redundancy up to 4 units without requiring additional hardware.
- Additional internal charger and external charger box provide flexible capacity expansion.
- Remote and local emergency power-off functions (EPO) to promptly manage the UPS when emergencies occur.
- Multi-connectivity interface to support remote UPS monitoring and management.
- Advanced management software to provide event alert management, remote shutdown, event log tracking and analysis.
- Reliable battery management for better battery protection.

# Delta UPS – Ultron Family



## HPH Series, Three Phase

20-120 kW

The Ultron HPH is a true online double-conversion UPS offering the best-in-class combination of maximum available power, unbeatable energy efficiency and superior power performance for small data centers and other mission critical applications requiring highly reliable power protection. With fully rated power (kVA=kW); the Ultron HPH provides maximum available power without de-rating the UPS. Thanks to three level inverter and Delta's innovative three phase PFC topology, it features low iTHD <3%, up to 96 % AC-AC efficiency and 99% efficiency in ECO mode resulting in significant TCO (Total Cost of Ownership) savings. Facilitating increased availability through special watch-dog design, the Ultron HPH is an ideal solution for protecting your mission critical operations.

### Applicable Sectors



Data Center



Telecom



Industrial



Network



Security



Lab



Medical



Metro



Banking

### Features:

- Fully rated power (kVA=kW) for maximum power availability
- Leading AC-AC efficiency up to 96% saves energy costs
- Low harmonic pollution (iTHD<3%) and high input power factor (>0.99) reduce upstream investment costs
- Wide input voltage range allows the UPS to operate in harsh electrical environments and extends battery life
- DSP based technology enables reduction in the number of electronic components to lower failure rate
- Redundant auxiliary power and fan design\* enhance system reliability
- A wide choice of configurations, such as N+X redundancy and hot stand-by
- Adjustable charging current and charging voltage meet different battery configuration requirements
- Flexible battery configuration optimizes battery investment
- Front-door battery replacement with hot-swappable battery tray design supports easy and quick replacement without turning the unit off (HPH-B / BN)
- Swappable interior architecture enables quick and easy maintenance\*
- Multi-connectivity interface supports remote UPS monitoring and management

\* Applied for 60-120kVA models

## Delta UPS – Ultron Family



### Applicable Sectors



Data Center



Telecom



Industrial



Network



Security



Lab



Medical



Metro

### NT Series, Three Phase

#### 20-500 kVA

The Ultron NT series is a three phase UPS featuring customized I/P-O/P ratings for various applications. With N+X parallel redundancy or expansion, it guarantees high availability and reliability for your critical loads.

The Ultron NT series offers continued seamless protection for your business even under 100% unbalanced loading conditions. Its economy mode improves efficiency and saves operating cost.

#### Features:

- Available from 20 to 4,000 kVA (8 x 500 kVA in parallel).
- Parallel redundancy without requiring extra hardware to increase reliability.
- Built-in isolation transformer protects user equipment.
- Optional 12pulse rectifier and additional filter or with APF, full load.
- Redundant auxiliary power and control circuit ensures higher reliability.
- Inbuilt maintenance and static bypass switch.
- Multi-language LCD display and LED status indicators.
- RS232, RS485 and six programmable dry contact outputs.
- Compatible with generator installation and unbalanced loads.
- Optional external battery cabinet for longer backup time.
- Parallel expansion as your business grows and consequently saves initial investment.
- Wide input voltage range extends battery lifetime.
- Economy mode saves energy and operating cost.
- Common battery installation saves initial investment.

# Delta UPS – Ultron Family



## Applicable Sectors



Data Center



Telecom



Industrial



Network



Security



Lab



Medical



Metro

## DPS Series, Three Phase

### 160-500 kVA

Delta's Ultron DPS is a double-conversion and IGBT-rectifier three phase UPS. With the three level IGBT topology for both PFC (power factor correction) and inverter, the Ultron DPS features industry leading performance of up to 96% AC-AC efficiency.

Thanks to Delta's advanced digital PFC control, it also has low iTHD < 3% and high input power factor > 0.99 resulting in significant total cost of ownership (TCO) savings.

Aiming to achieve the highest availability possible, Delta has enhanced special designs for battery management, swappable fans and ease of maintenance.

The excellent power performance and high system availability of the Ultron DPS provide customers with the benefits of a stable power supply, high power efficiency, low capital investment and low overall operation cost.

#### Features:

- N+X redundancy or hot-standby configuration increases system reliability
- Wide input voltage range allows the UPS to work in harsh electrical environments
- Field programmable sequential start-up
- Intelligent fan speed control and redundant fan design prevent overheating
- Comprehensive battery management sustains battery lifetime and optimal operation
- High efficiency even at light load saves operating costs
- High input power factor (> 0.99) and low input harmonic distortion (iTHD < 3%) save upstream investment
- Parallel expansion without extra hardware allows quick capacity upgrade to meet business growth
- Swappable fans reduce maintenance lead time
- Built-in manual bypass allows "zero downtime" to ensure system availability during service maintenance
- Main input, output and bypass switches detection provide quick diagnosis when faults occur



## Delta UPS – Modulon Family



### Applicable Sectors



Data Center



Telecom



Industrial



Network



Security



Lab



Medical



Metro

### NH Plus Series, Three Phase

#### 20-120 kVA

The Modulon NH Plus series is Delta's modular UPS featuring high efficiency, hot-swappable modular structure and N+X redundancy. With its high efficiency, the NH Plus series delivers remarkably low total cost of ownership in terms of both capital expense and operating expense.

With N+X module and system redundancy to guarantee reliability and availability, the Modulon NH Plus series is an excellent UPS solution to protect the mission critical applications.

#### Features:

- Available from 20 to 480 kVA (4 units x 120 kVA in parallel).
- Redundancy at module and system level.
- Hot-swappable function ensures uninterrupted operations during maintenance.
- Redundant auxiliary power and control circuit ensures higher reliability.
- Inbuilt maintenance and static bypass switch.
- Modular design provides easy maintenance and scalability.
- Multi-language LCD display and LED status indicators.
- Two SMART slots and six programmable dry contact outputs.
- Optional external battery cabinet for longer backup time.
- Low harmonic distortion (iTHD<3%) optimized generator size to save initial investment.
- High input and output power factor (I/P PF >0.99; O/P PF up to 0.9) and 94% high efficiency reduce operating costs.

# Delta UPS – Modulon Family



## DPH Series, Three Phase 25-75 / 150 / 200 kW

The Modulon DPH supports ultimate availability for datacenter operations and provides the benefit of “pay as you go” without over-sizing the UPS. While achieving ultimate availability, the Modulon DPH does not compromise on power efficiency performance. When availability, efficiency and expanding according to business needs are essential, the Modulon DPH is the ideal UPS system to provide power protection and total cost of ownership (TCO) savings.

### Applicable Sectors



Data Center



Telecom



Industrial



Network



Security



Lab



Medical



Metro



Banking

### Features:

- Advanced fault tolerance design achieved by self redundancy to guarantee operation continuity.
- Self-synchronization of power and control modules for continuous on-line operation even in the event of control module failure to avoid downtime caused by single point failure.
- Hot-swappable key modules and components to ensure Mean Time To Repair (MTTR) close to zero without downtime risk.
- Vertical expansion from 25kW to 75/150/200kW supporting N+X redundancy in a single rack enclosure to save footprint.
- Parallel expansion up to four units without requiring additional hardware.
- Optional Rack-Mount PDC (applicable for 75/150kW models) has flexibility to arrange its UPS's output power feeding according to its connected critical loads.
- Optional built-in battery modules (applicable for 75kW models) at maximum four units (four battery trays each)
- Full rated power (kVA=kW) to maximize power availability.
- High operating efficiency of 95% at 30% load and 96% from 50% load resulting in marked energy cost savings.
- Low harmonic pollution (iTHD<3%) to reduce upstream investment costs and meet demanding power requirements.
- Built-in manual bypass features to eliminate maintenance-related downtime.
- Proactive detection of fan failure and switch fault for early diagnosis on UPS malfunction.
- Plug and play modularity to simplify the maintenance process.

# Product Application Matrix

		Amplon				
		N Series 1-3 kVA (on-line)	N Series 6-12 kVA (on-line)	R Series 1-3 kVA (on-line)	RT Series 1-3 kVA (on-line)	RT Series 5-10 kVA (on-line)
Configuration	1:1	O	O	O	O	O
Configuration	3:1					
Configuration	3:3					
Rack	mountable			O	O	O
Stand-alone		O	O	O	O	O
Isolation	transformer		O			
Battery	,	I, E	I, E	E	I, E	E
Home	and * office	O			O	
Small and	enterprise, IT medical **	O	O	O	O	O
Medium telecom,	enterprise, IT, media ***		O			O
Heavy telecom, ****	industry, IT, Industrial					

I: internal battery, E: external battery

\* PCs, laptops, modems, printers, WiFi and audio equipment

\*\* Computers, servers, networking, medical control and diagnostics, education, banking, industrial automation

\*\*\* Telecom base stations, data centers, backbone networks, broadcasting, projection systems

\*\*\*\* Telecom centers, data centers, medical equipment at hospitals, government use, automatic control, oil, gas and power utilities, industrial equipment, automation and control

# Product Application Matrix

		Ultron				Modulon	
		EH Series 10-20 kVA (on-line)	HPH Series 20-120 kW (on-line)	NT Series 20-500kVA (on-line)	DPS Series 160-500kVA (on-line)	NH Plus Series 20-120kVA (on-line)	DPH Series 25-200kW (on-line)
Configuration	1:1						
Configuration	3:1	O		O			
Configuration	3:3		O	O	O	O	O
Rack	mountable						
Stand-alone		O	O	O	O	O	O
Isolation	transformer			O			
Battery	,	E	I (BN/B), E	E	E	E	I (75K), E
Home	and office						
Small and	enterprise, IT medical **	O	O				
Medium telecom,	enterprise, IT, media ***	O	O	O	O	O	O
Heavy telecom, ****	industry, IT, Industrial	O	O	O	O	O	

I: internal battery, E: external battery

\* PCs, laptops, modems, printers, WiFi and audio equipment

\*\* Computers, servers, networking, medical control and diagnostics, education, banking, industrial automation

\*\*\* Telecom base stations, data centers, backbone networks, broadcasting, projection systems

\*\*\*\* Telecom centers, data centers, medical equipment at hospitals, government use, automatic control, oil, gas and power utilities, industrial equipment, automation and control

## SNMP IPv6 Card



### Functions and features

#### ■ Network

SNMP	SNMPv1/v3 protocol support; accepts NMS monitoring as well as actively sends Trap packets to target hosts
HTTP/HTTPS	Support IPv4 and IPv6 TCP/IP protocol Monitor and set up through network browser with built-in web server
Others	Telnet, SSH, FTP, SFTP, BOOTP, DHCP, SMTP, SNTP, WOL and RADIUS, Syslog
MIB	Supports RFC1628 and Delta proprietary UPSv4 MIB, UPSv5 MIB

#### ■ Management

Regular power on and off	Can set up UPS power on and off time
Regular testing	Battery discharge test to ensure the battery is in good condition
Smart power off	Can send power off signal to connected host actively if the host computer has the InsightPower Client or SNMP power off proxy installed
Probe	Optional environment probe can integrate ambient temperature and humidity for total cabinet monitoring

#### ■ Diagnosis

Event log	Keep date, time, and event sequence in event log file
History records	Keep date, time, and UPS parameter data. Can be exported into XLS file for further processing

#### ■ Reaction to events

UPS shutdown	Define delay time for UPS power off to avoid deep discharge
Email	Send email notification to predefined recipients in case of power event

#### ■ Application

Integrate the communication requirement of UPS, PDC, STS, ATS and cooling with dip switches selection in one single SNMP IPv6 card

### Technical specifications


10 / 100M	RJ45	
Operation	connector temperature	0 ~ 60° C
Input	power	12 Vdc
Power	consumption	< 2W
Dimensions		130 X 60 mm
Weight		75 g

# EnviroProbe



## Functions and features

- LCD display
- Ambient temperature & humidity monitoring and water-leakage detection
- Digital & analog input/output contacts for monitoring and controlling other devices
- Supports SNMP communications protocol
- InsightPower Manager software for remote monitoring and recording

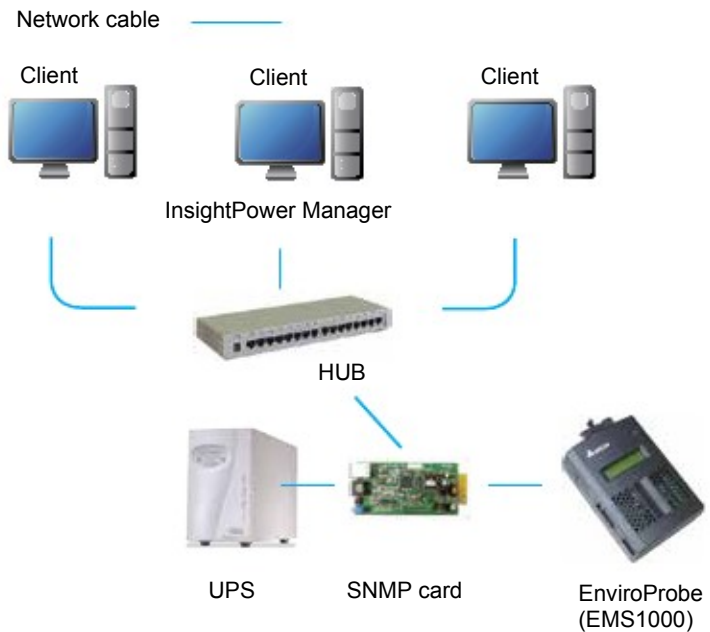

## Technical specifications

Model	EMS1000	EMS1100	EMS1200	
Input	EMS2000 Delta-BUS or SNMP Card: 12 Vdc (pin 1 & 4) with PDU SNMP card: 5Vdc (pin 2 & 4)			
Input/Output	Contacts	4 inputs (dry/wet)	4 digital outputs	2 analog inputs, 1 analog output and 1 water-leakage detection.
Dimensions	(W x D x H)	66 x 33 x 103 mm		
Weight		120g	130g	
Temperature		± 0.4°C @ 0°C ~ 60°C		
Humidity accuracy		±3% RH @ 0~80% RH		
Safety regulation compliance		CE, EN55022 Class B, EN55024		

# UPS Management

## Relay I/O card



Technical specifications	
Operation temperature	0 ~ 40°C
Input power	8 ~ 20 Vdc
Power consumption	< 1.2W
Dimensions	130 x 60 mm
Weight	200g

### Functions and features

- **Output Programmable**
  - 6 output relays, each of them can be configured to represent one of the 20 UPS events respectively
  - 6 output relays, each of them can be configured to either NC (Normal Close) or NO (Normal Open)
- **Input Programmable**
  - The input signal can be configured to turn off the UPS or to issue battery test command

## Modbus card



Technical specifications	
Operation temperature	0 ~ 40°C
Input power	8 ~ 20 Vdc
Power consumption	< 1.2W
Dimensions	130 x 60 mm
Weight	150g

Convert status and parameter data of your UPS to comply with the standard Modbus protocol

### Functions and features

- **Communications interface**
  - 1 x RS232 port; 1 x RS485 or RS422 port
- **ID**
  - Device ID can be set to any number between 0~255
- **Terminating resistor**
  - Terminating resistance of RS485 / 422 can be set by dip switch
- **Modbus Supports RTU format communications format**
- **Baud rate**
  - 2400, 4800, 9600 or 19200
- **Data bit**
  - 7 or 8
- **Parity check**
  - None, even or odd

## Mini SNMP Card



### Functions and features

<ul style="list-style-type: none"> <li>■ <b>Network</b></li> </ul>	<ul style="list-style-type: none"> <li>SNMP</li> <li>HTTP</li> <li>Others</li> <li>MIB</li> </ul>	<p>SNMPv1 protocol support; accepts NMS monitoring as well as actively sends Trap packets to target hosts</p> <p>Monitor and set up through network browser with built-in web server</p> <p>Telnet, TFTP, FTP, BOOTP, SMTP, SNTP, DHCP and WOL</p> <p>Supports RFC1628 and Delta proprietary UPSv4 MIB</p>
<ul style="list-style-type: none"> <li>■ <b>Management</b></li> </ul>	<ul style="list-style-type: none"> <li>Regular power on and off</li> <li>Regular testing</li> <li>Smart power off</li> </ul>	<p>Can set up UPS power on and off time</p> <p>Battery discharge test to ensure the battery is in good condition.</p> <p>Can send power off signal to connected host actively if the host computer has the InsightPower Client or SNMP power off proxy installed</p>
<ul style="list-style-type: none"> <li>■ <b>Diagnosis</b></li> </ul>	<ul style="list-style-type: none"> <li>Event log</li> <li>History records</li> </ul>	<p>Keep date, time, and event sequence in event log file</p> <p>Keep date, time, and UPS parameter data. Can be exported into XLS file for further processing</p>
<ul style="list-style-type: none"> <li>■ <b>Reaction to events</b></li> </ul>	<ul style="list-style-type: none"> <li>UPS shutdown</li> <li>Email</li> </ul>	<p>Define delay time for UPS power off to avoid deep discharge</p> <p>Send email notification to predefined recipients in case of power event</p>

### Technical specifications

Network connection	RJ-45 jack connector
Operation temperature	0 ~ 40° C
Input power	3.3 Vdc
Power consumption	1 Watt Maximum
Dimensions	60.5 x 40 mm
Weight	30 g



# UPS Management

## Mini USB Card



### Functions and features

- Communication Protocol
  - SCI: Delta Regular v1.51
  - USB: Delta HID Protocol v3.4
- Support HID (Human Interface Device) protocol
  - The UPS can communicate with Windows XP/2003/2008/2012/Win7/Win8 without monitoring software
- Compatible with Delta UPS standard software: UPSentry 2012

### Technical specifications

Dimensions	68 x 43 mm
Weight	30 g
Operating temperature	0 ~ 40° C
Input power	12 Vdc
Power consumption	0.5 Watts

## Mini Dry Contact Card



### Functions and features

- UPS status information presented as 3 contact closures
- Configurable input signal as shutdown UPS or battery test
- Programmable output contact to monitor status of UPS
- Configurable UPS shutdown delay time
- Protects up to 3 computers
- Unattended graceful shutdown

### Technical specifications

Dimensions	68 X 43 mm
Weight	35g
Operating temperature	0 ~ 40° C
Input power	8 ~ 20 Vdc
Power consumption	0.8 Watts

## Mini TVSS Card



### Functions and features

- This connection is optional but highly suggested as network lines often carry dangerous surges and spikes
- Connect the Network Protection Lines  
Connect the network line from the wall to the connector marked "IN", then connect the device (Ethernet card) to be protected to the connector marked "OUT"

### Technical specifications

Dimensions	46 x 43 mm
Weight	25g
Operating temperature	0 ~ 40° C

## Delta UPS Management Software

### Communications mechanism

	RS232	USB	RS485	SNMP
InsightPower Client				•
UPSentry 2012	•	•		
InsightPower Manager	•		•	•
ShutdownAgent 2012				•

### Key functions

	Shutdown OS	Centralized management	Remote control	Virtual Machine Shutdown			
				Hyper-v	ESXi	XenServer	KVM
InsightPower Client	•		•				
UPSentry 2012	•		•	•		•	•
InsightPower Manager		•	•				
ShutdownAgent 2012	•			•	•	•	•

### Operating system support

	Windows	Linux	FreeBSD	Sun	Sparc
InsightPower Client	•				
UPSentry 2012	•	•	•	•	
InsightPower Manager	•				
ShutdownAgent 2012	•	•	•	•	

# UPS Management

## InsightPower Manager


### Functions and features

- Centralized UPS management system
- Supports RS232, RS485 and network SNMP communications
- Supports backend database connections
- Hierarchical design for limitless connection nodes
- Configurable response action
- SNMP card setup in batch
- Remote and local UPS on-the-spot monitoring and management
- Provides statistical reports
- Can set up timed power on/off and testing time
- Supports inquiring events and historical data in database from other workstations with the accompanying InsightPower Manager Client program




### Operating system support

- Supports Microsoft Windows, 2000, XP, 2003, Vista, Win7, 2008
- Diagrammatic sketch of operating system :

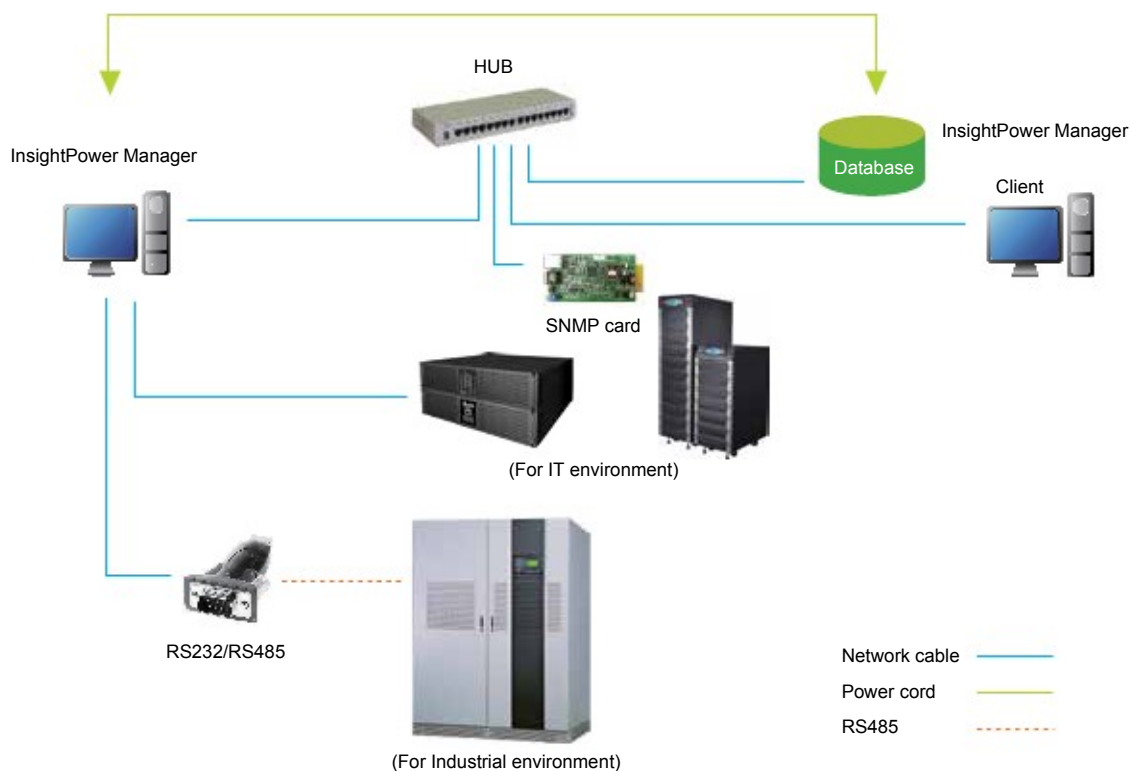


## Display

- Table: Displays UPS status in all or by group
- Hierarchical graph: Displays location of UPS object for fast review of status indicator, block diagram and real time data in selected region

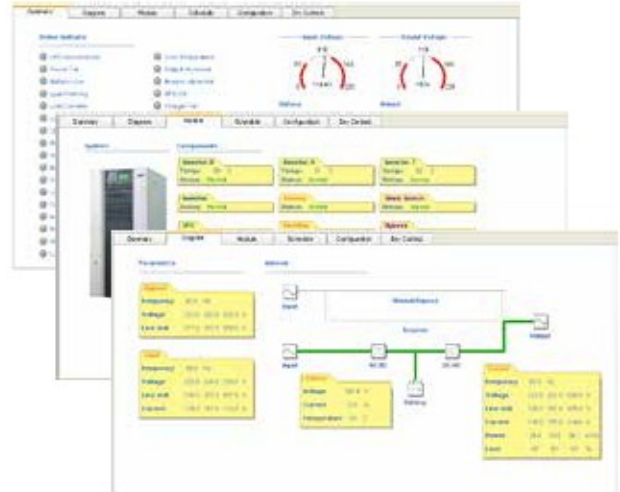


## Responsive actions

- Event log
- Network broadcasting
- Voice alert
- Email
- SMS

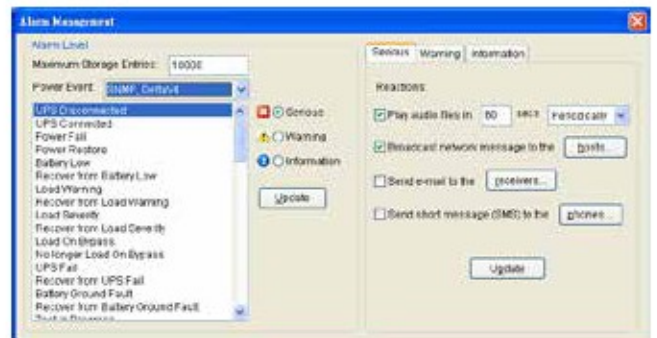

## Event tracking

- Log UPS events and operation record in sequence of date and time
- Supports historical data and curve display as well as exporting as files in Excel format
- Supports statistical report generation in a specified time range

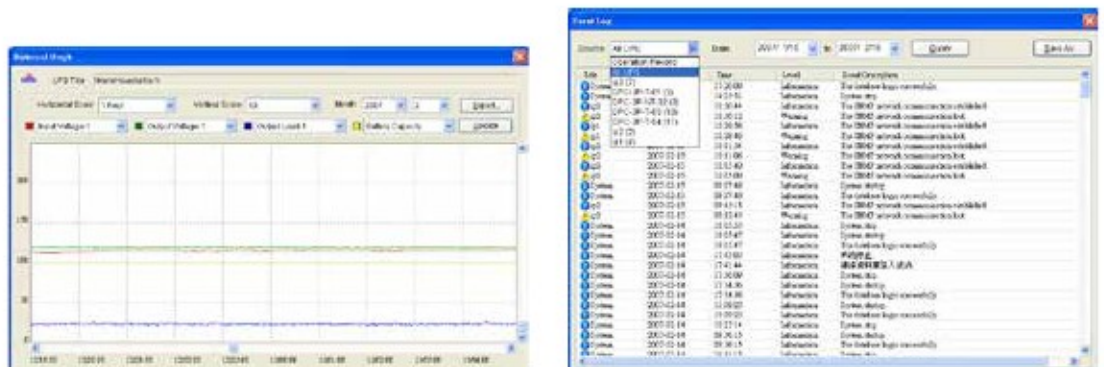

# UPS Management

## InsightPower Client

### Functions and features

- Supports the DeltaSNMP communications protocol
- Does multi hosts sleep/wakeup when combined with the InsightPower SNMP card
- Monitors software exclusively designed for InsightPower SNMP card
- Human-free automatic operating system close and archive
- Supports the Windows sleep function
- Mandatory setup response action
- Remote UPS on-the-spot management

### Power off time settings


- Input power failure
- Battery capacity lower than setup value
- UPS battery voltage low
- Timed power off

### Responsive actions

- Keep power events in sequence of date, time, and event description
- Voice alert
- Network broadcasting
- Email
- SMS
- Executes external programs and commands

### Display

- On-the-spot digital monitoring
- Multiple display format including: dashboard, scale, indicator and graph
- Fast event and historical data inquiry
- Automatic historical data statistics

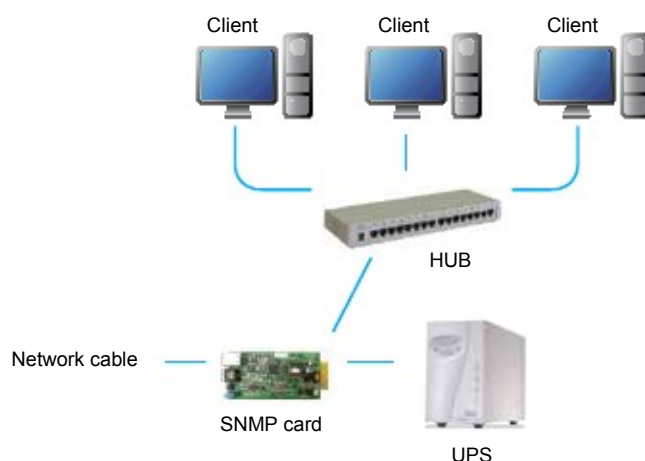

### Scheduling

- Weekly or by given dates
- Power on and off time setups
- Fast battery test
- Deep battery test

### Event tracking

- Keeps power events in sequence of date, time, and event description
- Keeps digital records for power quality analysis

### Smart power off

- Press the smart power off button in web page of SNMP card to turn off any operating system installed with InsightPower Client and Shutdown Agent programs
- Smart power off shares the same settings with battery capacity low

## UPSentry 2012

### Functions and features

- Support RS232 and USB communication
- Provide web interface through HTTP and HTTPS
- Provide the batch configuration to deploy settings at a finger click
- Support SNMP Trap v1, v2c, v3
- Support SNMPv1, v3 server access for monitoring

UPSentry 2012 status and configure shutdown parameters


- Work with ShutdownAgent 2012 to protect a huge number of hosts
- Provide console configuration for basic system parameters setup
- Support 32/64 bits software programs

### Operating system support

- Windows XP-sp2, Vista, 7, 8
- Windows 2003, 2008, 2012
- Windows 2008 Server Core, Hyper-V 2008 R2
- Linux OpenSUSE 11.4
- Linux ubuntu 10.04
- Linux Fedora 3.1.9
- CentOS 5.8
- Citrix XenServer 6.0.0
- Linux KVM

### Event Tracking

- Support 10,000 event log entries
- Display history values by a single date, month and year or a defined period of time
- Export data in csv. file format
- Clear the history data and event logs on the web interface

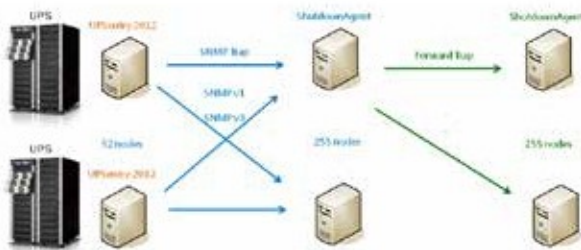

### Scheduling

- Support scheduling shutdown, restart and battery test
- System power on/off
- 10 seconds test and deep discharge test

### Shutdown Protection

- Input power fail
- Battery low
- Overload
- Bypass
- Schedule Shutdown

### Web Interface

- Monitor UPS status through web interface
- System Summary: UPS identification, shutdown type, scheduling information and last five event log
- Battery: battery status, battery measurement, battery cabinet and replacement date
- In/Out/Bypass: Information of input measurement, bypass measurement and output measurement
- Identification: Information of identification and UPS rating


- Status Indication: Information of immediate UPS status indication
- Power Module: Information of power module bypass and power module ID1/2/3/4
- Shutdown Agent: Collect all of the ShutdownAgent 2012 which you assigned to work with UPSentry 2012 to protect a group of servers
- Display event log and history values

# UPS Management

## Shutdown Agent 2012

### Functions and features

- Support SNMPv1, v3 trap
- Provide web interface through HTTP and HTTPS
- Provide the batch configuration to deploy settings at a finger click
- Forward SNMP trap to extend protecting up to 255 servers
- Support up to 32 input trap sources for redundant (logical OR) and parallel (logical AND) application
- Provide console configuration for basic system parameters setup
- Support Windows 32/64 bits setup programs

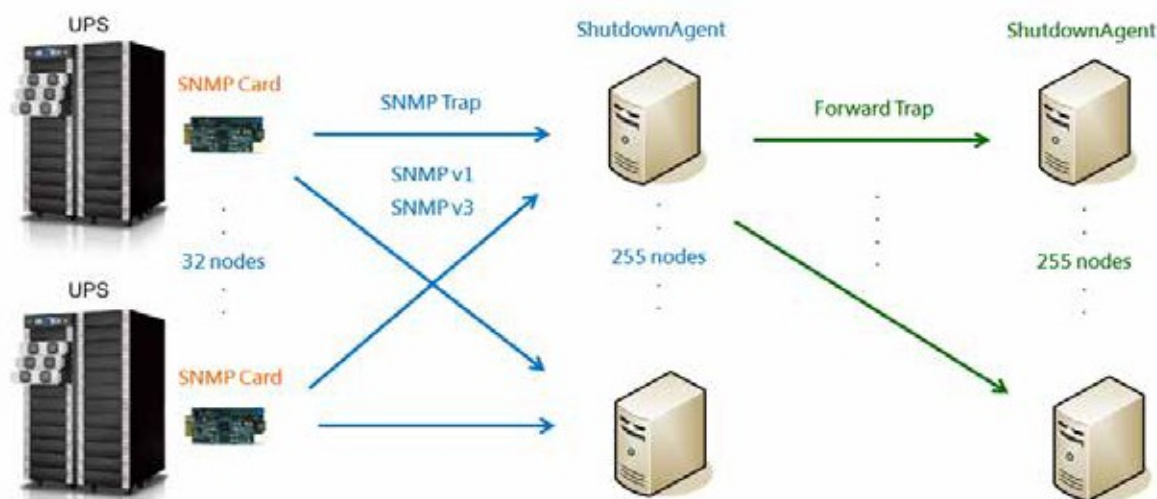

### Operating system support

- Windows XP-sp2, Vista, 7, 8
- Windows 2003, 2008, 2012
- Windows 2008 Server Core, Hyper-V 2008 R2
- Linux OpenSUSE 11.4
- Linux ubuntu 10.04
- Linux Fedora 3.1.9
- CentOS 5.8
- VMWare ESXi 4.1, 5
- Citrix XenServer 6.0.0
- Linux KVM

## N Series, Single Phase

Model		N-1K	N-2K	N-3K
Power	Rating	1kVA/0.9kW	2kVA/1.8kW	3kVA/2.7kW
Input	Nominal Voltage	220/230/240 Vac		
	Voltage range	175 ~ 280 Vac (full load); 80~175 Vac (50%-100% load)		
	Frequency	40~70Hz		
	Power Factor	> 0.99 (full load)		
	Current Harmonic Distortion	<3%		
Output	Power Factor	0.9		
	Voltage	220/230/240 Vac		
	Frequency	50/60 Hz ± 0.05 Hz		
	Voltage Harmonic Distortion	< 3% (linear load)		
	Overload Capability	< 105%: continuous; < 105% ~ 125%: 1 minutes: 125% ~ 150%: 30 seconds		
	Receptacle	IEC C13 x 4	IEC C13x6, C19x1	
Efficiency	AC-AC	91%	Up to 93%	
Battery	Nominal Voltage	24 Vdc	48 Vdc	72 Vdc
	Typical Backup Time	4.5 min.(full load); 13 min.(half load)		
	Recharge Time	3hrs to 90%		
Audible	Noise	< 43 dB	< 48 dB	
Display		LCD panel		
Communication Interfaces		MINI Slot x 1, USB Port x 1		
Conformance	Safety	CE, RCM, KC		
Physical	Dimensions (Wx Dx H)	145 x 320 x225 mm	190 x 390 x325 mm	
	Weight	9 kg	18.6 kg	24.4 kg
Environment	Operating Temperature	0 ~ 40° C		
	Relative Humidity	0% ~ 95% (no condensing)		

\* All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management





## N Series, Single Phase, 120V

Model		N-1K	N-2K	N-3K
Power	Rating	1kVA/0.7kW	2kVA/1.4kW	3kVA/2.1kW
Input	Nominal Voltage	100/110/120 Vac, single phase		
	Voltage Range	80~140Vac (full load), 50~80Vac (50%~100% load)		
	Frequency	45~65Hz		
	Power Factor	> 0.97		
Output	Voltage Regulation	± 2%		
	Frequency	50 / 60 ± 0.05 Hz		
	Voltage Harmonic Distortion	<4% (linear load)		
	Overload Capability	<105%: Continuous; 105~125%: 3 minutes 125~150%: 30 seconds; >150%: 0.5 second		
	Receptacle	NEMA 5-15Rx2x2	NEMA 5-15Rx2x2; Terminal	
Battery	Rating	12V/7Ah, 36Vdc	12V/7Ah, 72Vdc	12V/9Ah, 72Vdc
	Typical Backup Time	14 minutes (half load); 5 minutes (full load)		
	Recharge Time	≥ 8 hours to 80 ~ 90%		
	(Loading Level: 75%)			
Display	LED	Online, Bypass, On-battery, Overload, Battery low, Fault, Replace battery, Battery level, Loading level		
Communication Interfaces	Standard	RS232 x 1, SNMP slot x 1		
Conformance	Safety	UL/cUL		
	EMC	FCC CLASS B	FCC CLASS A	FCC CLASS A
Efficiency	AC-AC	> 87% (full load)		
Other Features	Battery Start	Yes		
	Extended Battery Cabinet	Optional		
Efficiency	AC-AC	> 87 % (full load)		
Environment	Temperature	0 ~ 40 °C		
	Relative Humidity	0% ~ 95 % (non-condensing)		
	Noise	40 dB	47 dB	52 dB
Physical	Dimensions (WxDxH)	140 x 366 x 242 mm	140 x 425 x 373 mm	140 x 425 x 373 mm
	Weight	14 kg	29 kg	30.5 kg

All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



## R Series, Single Phase

Model		R-1K	R-2K	R-3K
Power	Rating	1kVA/0.7kW	2kVA/1.4kW	3kVA/2.1kW
Input	Nominal Voltage	220/230/240 Vac		
	Voltage Range	175-280 Vac (full load) ; 80-175 Vac (50-100% load)		
	Frequency	40 - 70 Hz		
	Power Factor	> 0.97		
Output	Voltage	220/230/240 Vac		
	Voltage Regulation	± 2%		
	Frequency	50 / 60 ± 0.05 Hz		
	Voltage Harmonic Distortion	< 3% (linear load)		
	Overload Capability	105 ~ 125%: 3 minutes; 125 ~ 150%: 30 seconds; > 150%: 1 second		
	Receptacle	IEC320 C13 x 4	IEC320 C13 x 8 IEC320 C19 x 1	IEC320 C13 x 8 IEC320 C19 x 1
Battery & Charger	Nominal Voltage	36 Vdc	72 Vdc	72 Vdc
	Charge Current	Built-in: max. 5A Additional charger (optional)	Built-in: max. 4.5A	Built-in: max. 4.5A
Communication Interfaces	Standard	RS232 x 1, SNMP slot x 1		
Conformance	Safety	CE		
Efficiency	AC-AC	> 87% (full load)		
Environment	Operating Temperature	0 ~ 40°C		
	Relative Humidity	0 ~ 95% (non-condensing)		
	Audible Noise (at one meter)	46 dB	47 dB	55 dB
Physical	Dimensions (WxDxH)	440 x 450 x 89 mm		
	Weight	6.7 kg	9.2 kg	9.2 kg

All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



## GAIA Series, Single Phase, 120V

Model		GAIA-1K	GAIA-2K	GAIA-3K
Power Input	Rating	1kVA/0.8kW/2kVA/1.6kW		3kVA/2.1kW
	Nominal Voltage	110/120 Vac		
Output	Voltage Range	65-80 Vac (70-100% load)		65-90 Vac (70-100% load)
	Frequency	45~65Hz		
	Power Factor	> 0.97		
	Voltage	110/120 Vac		
	Voltage Harmonic Distortion	< 3% (linear load)		
	Voltage Regulation	± 2%		
	Frequency	50 or 60(default) ± 0.05 Hz		
	Overload Capability	<105%: Continuous; 105~125%: 3 minutes		
	Receptacle	125~150%: 30 seconds; >150%: 0.5 second NEMA 5-15Rx2x3/NEMA L5-20Rx1		NEMA L5-30Rx1
	Battery	Rating	12V/8.5Ah, 24Vdc	NEMA 5-15/20Rx6 12V/8.5Ah, 48Vdc
Recharge Time		≤ 6 hours to 80%		
Typical Backup Time		13 minutes (half load)	13.5 minutes (half load)	15 minutes (half load)
Display	LED	4 minutes (full load) / 4 minutes (full load) / 5 minutes (full load)		
		Online, Bypass, On-battery, Overload, Battery low, Fault, Replace battery,		
Communication Interfaces	Standard	Battery level, Loading level RS232 x 1, USB x 1, SNMP Slot x 1		
Other Features	Extended Battery Cabinet	Optional		
	AC-AC	> 87% (full load)		
Environment	Temperature	0 ~ 40 °C		
	Relative Humidity	0% ~ 95% (non-condensing)		
	Noise	45 dB/50 dB		60 dB
Physical	Dimensions (WxDxH)	UPS	440 x 335 x 89 mm	440 x 432 x 89 mm
		Battery Cabinet	440 x 335 x 89 mm	440 x 432 x 89 mm
	Weight	UPS	13 kg/21 kg	16 kg/29 kg
		Battery Cabinet		31 kg / 43 kg

All specifications are subject to change without prior notice.



2007~2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECC Certificate of Hazardous Substance Process Management

## RT Series, Single Phase

Model		RT-1K	RT-2K	RT-3K
Power	Rating	1kVA/0.9kW	2kVA/1.8kW	3kVA/2.7kW
Input	Nominal Voltage	200*/208*/220/230/240Vac		
	Voltage range	175-280Vac (full load); 120-175Vac (70-100% load)		
	Frequency	40~70Hz		
	Power Factor	> 0.99 (full load)		
	Current Harmonic Distortion	<5%		
Output	Power Factor	0.9		
	Voltage	200*, 208*, 220, 230, 240 Vac		
	Voltage Regulation	± 2% (linear load)		
	Frequency	50/60 Hz ± 0.05 Hz		
	Voltage Harmonic Distortion	< 3% (linear load)		
	Overload Capability	< 105%: Continuous; 105% ~ 125%: 1 minute; 125% ~ 150%: 15 seconds		
	Receptacle	IEC C13x3x2	IEC C13x3x2, IEC C19x1	IEC C13x3x2, IEC C19x1
Efficiency	AC-AC	90%	Up to 94%	
	ECO Mode	95%	Up to 97%	
Battery	Nominal Voltage	12V/9Ah, 24Vdc	12V/9Ah, 48Vdc	12V/9Ah, 72Vdc
	Typical Backup Time**	6.5 minutes	7.5 minutes	
	Charge Current	1.5A	2A	2A
	Recharge Time	3 hours to 90%		
Audible	Noise	< 40 dB	< 42 dB	< 49 dB
Display		LCD display and LED indicators		
Communication Interfaces		SMART Slot x 1, RS-232 Port x 1, USB Port x 1, REPO x 1		
Compliance		CE, RCM, KC		
Dimensions (W x H)	UPS	440 x 335 x 89 mm	440 x 432 x 89 mm	440 x 610 x 89 mm
	External Battery Pack	440 x 335 x 89 mm	440 x 432 x 89 mm	440 x 610 x 89 mm
Weight	UPS	12 Kg	18 Kg	28 Kg
	External Battery Pack	15 Kg	27 Kg	44 Kg
Environment	Operating Temperature	0 ~ 40°C		
	Relative Humidity	0 ~ 95% (non-condensing)		

\* When the UPS is de-rated to 90% of its capacity.

\*\* When the total load reaches 75%.

All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



## RT Series, Single Phase

Model		RT-5K	RT-6K	RT-10K	
Power	Rating	5kVA/4.5kW	6VA/5.4kW	10kVA/9kW	
Input	Nominal Voltage	200/208/220/230/240 Vac			
	Voltage Range	156--280Vac (full load); 100-155 Vac(50-100% load)		180-280Vac (full load); 100-180Vac (50-100% load)	
	Current Harmonic Distortion	< 5% (full load)			
	Power Factor	> 0.99 (full load)			
	Frequency	40 ~ 70 Hz			
Output	Voltage	200/208/220/230/240 Vac			
	Voltage Harmonic Distortion	< 2% (linear load)			
	Voltage Regulation	± 1% (static); ± 2% (typical)			
	Frequency	50/60 ± 0.05 Hz			
	Overload Capability	<=105%: Continuous; 106 ~ 110%: 10 minutes; 111 ~ 125%: 5 minutes; 126 ~ 150%: 30 seconds			
Battery & Charger	Nominal Voltage	192 Vdc	192 Vdc	240 Vdc	
	Charge Current	Built-in: maximum 4A (adjustable); Additional charger board (optional): maximum 4A (internal installation)			
Communication Interfaces	Standard	RS 232 x1, SMART slot x 1; MINI slot x 1, Parallel port x1, REPO/ROO			
Compliance	Safety	CE, RCM, KC			
Other Features	Parallel Redundancy	1+1			
	Common Battery Installation	Yes			
Efficiency	AC-AC	92%			
	ECO Mode	96%			
Environment	Operating Temperature	0 ~ 40°C			
	Relative Humidity	0 ~ 95% (non-condensing)			
	Audible Noise	< 56 dB	< 58 dB	< 58 dB	
Physical	Dimensions (WxDxH)	UPS	440 x 671 x 89 mm	440 x 671 x 89 mm	440 x 623 x 131 mm
		Battery Pack	440 x 638 x 89 mm	440 x 638 x 89 mm	440 x 595 x 131 mm
	Weight	UPS	15 kg	15.5 kg	21.3 kg
		Battery Pack	36 kg	36 kg	66 kg

All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



## N Series, Single Phase

Model		N-6K	N-12K
Rated	Capacity	6kVA/4.2kW	12kVA/8.4kW
Input	Rated voltage	220V / 230V / 240V	
	Voltage Range	176~280Vac (full load); 120~176V (70%~100% load)	
	Frequency Range	60Hz±0.05Hz	
	Input Power Factor	>0.99	
Output	Voltage Range	120V, 220V	
	Voltage Stability Margin	±2%	
	Frequency Range	60Hz±0.05Hz	
	Overload capacity	102%~125% for 1 minute	
		125%~150% for 30 seconds > 150% immediately	
	Overall Efficiency (normal input voltage)	AC-AC : >88%	
		ECO Mode : >94%	
Battery	Typical Backup Time	≥7 minutes	≥3 minutes
Communication Interfaces	Standard	RS232 x 1, SNMP slot x1, Dry contact port x 1, REPO	
Environment	Noise (1m away)	<53dB	<65dB
	Temperature	0~40°C	
	Humidity	0-95% (non-condensing)	
Compliance	Safety	EN50091-1-1 / CE	
Mechanical	External Battery	Yes (Optional)	
	Dimensions (WxDxH)	280 x 581 x 783.8 mm	
	Weight	133 kg	165 kg

All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



## N Series, Single Phase 6/10 kVA

Model		N-6K	
Power	Rating	6kVA/6kW	10kVA/10kW
Input	Nominal Voltage	200/208/220/230/240 Vac	
	Voltage Range	200/208 (de-rating to 90%) : 100Vac~280Vac* 220/230/240 : 100Vac~280Vac**	
	Frequency	40Hz ~ 70Hz	
	Power Factor	>0.99 (full load)	
	Current Harmonic Distortion	< 3%	
Output	Power Factor	1	
	Nominal Voltage	200/208/220/230/240 Vac	
	Frequency	50/60 ±0.05 Hz	
	Current Harmonic Distortion	< 2% (linear load)	
	Overload capability	< 105%: continuous; 105% ~ 125%: 2 minutes; 125% ~ 150%: 30 seconds	
	Crest factor	3:1	
Efficiency	AC-AC	Up to 95%	
	ECO mode	Up to 98%	
Battery	Voltage	192-264Vdc adjustable	
	Charge current	1.5-8A selectable	
Audible	Noise	< 50dBA	
Display		LED indicators and LCD display	
Communication Interfaces		REPOx1, RS-232 Port x1, USB Port x1, Parallel Port x2, Smart Slot x1	
Physical	Dimensions (WxDxH)	190 x 390 x 325 mm	
	Weight	10.1 kg	12.7 kg
Environment	Operating Altitude	1000 meters (without de-rating)	
	Operating Temperature	0 ~ 40°C(at 100% load) 45 ~ 55°C(de-rating to 80%)	
	Storage Temperature	-15 ~ 50°C	
	Relative Humidity	5 ~ 95% (non-condensing)	

Note:

\* Linear de-rating between 40%~90% load at 100Vac~175Vac.

\*\*Linear de-rating between 40%~100% load at 100Vac~194Vac.

All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



RoHS

## EH Series, Three Phase In - Single Phase Out

Model		EH-10K	EH-15K	EH-20K
Power	Rating	10kVA/8kW	15kVA/12kW	20kVA/16kW
Input	Nominal Voltage	380/220Vac, 400/230Vac, 415/240Vac ( 3 phase , 4 - wire+G )		
	Voltage Range	305~477Vac (full load); 208~304Vac (50%~100% load)		
	Power Factor	> 0.95 (full load)		
	Frequency	45~65Hz		
Output	Voltage	220/230/240 Vac		
	Voltage Harmonic Distortion	< 3% (linear load)		
	Voltage Regulation	± 2%		
	Frequency	50/60 ± 0.1 Hz		
	Overload Capability	≤105 %: continuous; 106%~110%: 10 minutes; 111%~125%: 5 minutes; 126%~150%: 30 seconds		
Battery & Charger	Battery Voltage	240 Vdc		
	Charge Current	Built-in: 4A, Additional charger board (optional): 4A		
Communication Interfaces		SMART slot x 1, MINI slot x 1, Parallel Port x 2, RS232 Port x 1, REPO Port x 1, Charger Detection Port x 1		
Conformance	Safety	CE		
Other Features	Emergency Power Off	Local and remote		
	Maintenance Bypass Switch	Built-in		
Efficiency	AC-AC	91%		
	ECO Mode	96%		
Environment	Operating Temperature	0 ~ 40°C		
	Relative Humidity	5 ~ 95% (non-condensing)		
	Audible Noise	< 55 dB	< 60 dB	< 60 dBIP20
	IP Protection			
Physical	Dimensions (W x D x H)	200 x 490 x 490 mm	250 x 610 x 650 mm	
	Weight	26 kg	45 kg	

All specifications are subject to change without prior notice.



2007~2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management





## HPH Series, Three Phase

Model	HPH-20K HPH-20K-BN/B	HPH-30K HPH-30K-BN/B	HPH-40K HPH-40K-BN/B	HPH-60K	HPH-80K	HPH-100K	HPH-120K
<b>Power Rating</b>	20kVA/kW 30kVA/kW 40kVA/kW 60kVA/kW 80kVA/kW 100kVA/kW 120kVA/kW						
<b>Input</b>	380/220Vac, 400/230Vac, 415/240Vac (3 phase, 4-wire + G)						
Nominal Voltage	300~477 Vac (full load), 228~300 Vac (70%~100% load) 332~477 Vac (full load), 228~332 Vac (63%~100% load)						
Voltage Range	40~70Hz						
Frequency	> 0.99 (full load)						
Power Factor	< 3%						
Current Harmonic Distortion	380/220Vac, 400/230Vac, 415/240Vac (3 phase, 4-wire + G)						
<b>Output</b>	Voltage Regulation ±1 %						
Voltage Regulation	< 1.5 % (linear load) < 2% (linear load)						
Voltage Harmonic Distortion	≤105 %: continuous; 106% ~ ≤125%: 10 minutes; 126% ~ ≤150%: 1 minute; >150%: 1 second						
Overload Capability	1						
Output Power Factor	50/60Hz +/- 0.05Hz						
Frequency	240 Vdc						
<b>Battery</b>	Support SMF/VRLA/Tubular/Ni-Cd						
Battery Voltage	32-50 pcs 32-46 pcs***						
Type	5A 9A 9A 10A 15A 20A 20A Built-in						
Quantity	Additional charger board (optional) 20A 20A 40A 40A						
Charge Current (Max.)	Typical Backup Time ** 15 min 10 min 9.5 min						
	SMART Slot x 1, MINI Slot x 1, Parallel Port x 2, RS232 Port x 1, REPO Port x 1, Charger						
<b>Communication</b>	Detection Port x 1, Input Dry Contact x 2, Output Dry Contact x 6, USB Port x 1*						
<b>Interfaces</b>	Safety CE, RCMCE						
<b>Conformance</b>	Parallel Redundancy Up to 4 units						
<b>Other</b>	Emergency Power Off Local and remote						
<b>Features</b>	Maintenance Bypass Switch Yes						
	> 96% (HPH 40-120K peak efficiency is tested by TÜV) Efficiency AC-AC up to 96%						
	Up to 99% ECO Mode						
<b>Environment</b>	Operating Temperature 0 ~ 40 °C						
	Relative Humidity 5% ~ 95% (non-condensing)						
	Audible Noise < 55 dB < 60 dB < 65 dB						
	380 x 800 x 800 mm 520 x 800 x 1175 mm 520 x 800 x 1760 mm Physical Dimensions (W x D x H)						
	66.5 Kg 86.06 Kg 86.5 Kg 186.5 Kg 191 Kg 312 Kg 312 Kg Weight						
<b>Physical</b>	Dimensions (W x D x H) 490 x 830 x 1400 mm						
	( BN / B ) Weight (with batt.) 365 kg 385 kg						
	Weight (without batt.) 131 kg 162 kg						

HPH-B: UPS integrated battery model has batteries inside  
 HPH-BN: UPS integrated battery model has no batteries inside

\* Applied for models HPH-60/80/100/120K

\*\* At 70% load with internal battery strings.

\*\*\* UPS needs de-rating for battery quantity 32-36 pcs. Please contact authorized Delta personnel.

All specifications are subject to change without prior notice.



2007-2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



Delta Ultron HPH 40-120kVA Efficiency is tested by TÜV



Applied for models HPH-20/30/40K

## NT Series, Three Phase

Model		NT-20K	30K	40K	50K	60K	80K	100K	120K	160K	200K	260K	320K	400K	500K				
Power	Rating kVA	-	20	30	40	50	60	80	100	120	160	200	260	320	400	500			
Power	Rating kW	-	18	27	36	45	54	72	90	108	144	180	234	288	360	450			
Input	Nominal Voltage	208/120, 380/220, 400/230, 415/240, 480/277 Vac (3 phase, 4-wire + G)																	
	Voltage Range	305~499 Vac																	
	Current Harmonic Distortion	<3% (with optional rectifier or passive filter, full load)																	
	Frequency	45~65Hz																	
Output	Voltage	208/120, 380/220, 400/230, 415/240, 480/277 Vac (3 phase, 4-wire + G) 220, 230, 240 Vac (1 phase) *																	
	Output Power Factor	0.9																	
	Voltage Harmonic Distortion	≤ 3% (linear load)																	
	Voltage Regulation	± 1% (static)																	
	Frequency	50/60 Hz ± 0.01% (internal oscillator); ± 1% (synchronized)																	
	Overload Capability	≤ 110%: 60 minutes; 110 ~ 125%: 10 minutes; 126 ~ 150%: 1 minute																	
Communication Interfaces	Standard	RS232 x 1, RS485 x 2, SMART slot x 1, Output dry contact x 6																	
Other Features	Parallel Redundancy	Up to 8 units																	
	Emergency Power Off	Local and remote																	
	Event Log	500 records																	
	Input Harmonic Improvement	Optional harmonic filter and 12-pulse rectifier																	
Efficiency	AC-AC	90%	91%	91.5%	92%	92.5%	93%												
	ECO Mode	>97%	>97.5%																
Environment	Operating Temperature	0 ~ 40°C																	
	Relative Humidity	0 ~ 95% (non-condensing)																	
	IP Protection	IP20																	
	Audible Noise (at 1.5 meters)	≤ 60dB					≤ 65dB					≤ 68dB			≤ 72dB		≤ 77dB		
Physical-6pulse	Dimensions ** Width	mm	600					800					830			995		n/a	
	Depth	mm	800					830					1200			1600		n/a	
	Height	mm	1400					1700					1700			1950		n/a	
	Weight ***	kg	365	365	425	460	506	525	700	745	1050	1085	1680	1720	1920	2410	10		
Physical-12pulse	Dimensions ** Width	mm	600					830					830			800		995	
	Depth	mm	800					800					1200			1400		1600	
	Height	mm	1400					1700					1700			1700		1950	
	Weight ***	kg	450	500	590	640	690	860	1070	1102	1430	1560	2150	2400	2645	3110			

\* Single phase output voltage: 220/230/240 is only for 20 ~ 40 kVA models.

\*\* Standard rating is 380/220 Vac with 6 pulse rectifier. For models: (1) different rating (2) with 12 pulse rectifier or filter, dimensions and weight would be different from standard models. Please contact your local supplier for more information.

\*\*\* 500 kVA model is assembled into two cabinets: Inverter (width=1100 mm, 1760 kg) and Rectifier (width=800 mm, 650 kg).

All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



## DPS Series, Three Phase

Model		DPS-160K	DPS-200K	DPS-300K	DPS-400K	DPS-500K
Power	Rating	160kVA/144kW	200kVA/180kW	300kVA/270kW	400kVA/360kW	500kVA/450kW
Input	Nominal Voltage Voltage Range Current Harmonic Distortion Power Factor Frequency	380/220V, 400/230V, 415/240V (3 phase, 4-wire +G) 324~477 Vac (full load); 242~324 Vac (70%~100% load) < 3%* > 0.99 45~65Hz				
Output	Voltage Output Power Factor Voltage Harmonic Distortion Voltage Regulation Frequency Overload Capacity	380/220V, 400/230V, 415/240V (3 phase, 4-wire +G) 0.9 ≤ 1.5 % (linear load) ±1% (static) 50/60 ± 0.05 Hz ≤ 125%: 10 minutes ; ≤ 150%: 1 minute				
Communication Interfaces	Standard	RS232 x 1, Smart slot x 2, Output dry contact x 6, Input dry contact x 7, (Input dry contact (two sets), REPO x 1, External battery cabinet status detection x 1, External battery cabinet temperature detection x 4), Parallel port x 2, USB port x 1				
Display		Mimic LCD supports multi-language and LED indicators				
Conformance	Safety	CE,RCM				
Other	Features	Parallel Redundancy Emergency Power Off Event Log Up to 8 units Local and remote 500 records				
Efficiency	AC-AC ECO Mode	Up to 96% Up to 99%				
Environment	Operating Temperature Relative Humidity Audible Noise (at one meter) IP Protection	0 ~ 40°C 0 ~ 95% (non-condensing) <70 dB IP20		<73 dB		<76 dB
Physical	Dimensions (WxDxH) Weight	850x865x1950 mm 697 kg		1600x865x1950 mm 1200 kg		1220 kg

\* When input harmonic distortion is less than 1%.  
All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



**TÜVRheinland®**  
Precisely Right.



Delta Ultron DPS 160~400kVA  
Efficiency is Tested by TÜV

## NH Plus Series, Three Phase

Model		NHP-20K	NHP-40K	NHP-60K	NHP-80K	NHP-100K	NHP-120K
Power	Rating	20kVA/18kW	40kVA/36kW	60kVA/54kW	80kVA/72kW	100kVA/90kW	120kVA/108kW
Input	Nominal Voltage	380/220, 400/230, 415/240 Vac (3 phase, 4-wire + G)					
	Voltage Range	300~477 Vac (full load), 208~300 Vac (70%~100% load)					
	Current Harmonic Distortion	< 3% (full load)					
	Power Factor	> 0.99					
	Frequency	45~65Hz					
Output	Voltage	380/220, 400/230, 415/240 Vac (3 phase, 4-wire + G)					
	Output Power Factor	0.9					
	Voltage Harmonic Distortion	< 3% (linear load)					
	Voltage Regulation	± 1% (static)					
	Frequency	50/60 ± 0.05 Hz					
	Overload Capability	≤ 125%: 10 minutes; ≤ 150%: 1 minute					
Interface	Standard	RS232 x 1, SMART slot x 2, Output dry contact x 6, Input dry contact x 2, Battery cabinet temperature x 4, Battery cabinet status detection x 1, Parallel port x 1, REPO x 1					
Conformance	Safety	CE, RCM					
Other	Features	Parallel Redundancy					
	Emergency Power Off	Module and system redundancy; Maximum 4 units in parallel up to 480 kVA					
	Event Log	Local and remote					
Efficiency	AC-AC	500 records					
	ECO Mode	94%					
Environment	Operating Temperature	97%					
	Relative Humidity	0 ~ 40°C					
	Audible Noise (at one meter)	< 65dBA	< 68dBA	< 68dBA	< 70dBA	< 72dBA	< 73dBA
	IP Protection	0 ~ 95% (non-condensing)					
Physical	Dimensions	UPS	520 x 855 x 1165 mm			520 x 975 x 1695 mm	
	(WxDxH)	Battery Pack	520 x 855 x 1165 mm (26 Ah x 40 pcs)			520 x 975 x 1695 mm (40 Ah x 40 pcs)	
	Weight		170 kg	200 kg	230 kg	260 kg	350 kg

\* Power rating in kW is Subject to reconfiguration of the UPS; Delta provides the configuration service. All specifications are subject to change without prior notice.



2007~ 2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



# Technical Specifications

## DPH Series, Three Phase

Model		DPH-75K	DPH-150K	DPH-200K
Power	Rating	75kVA	150kVA	200kVA
Power	Module	25kW		
Input	Rating	380/220V, 400/230V, 415/240V (3 phase, 4-wire +G)		
	Nominal Voltage			
	Voltage Range	305-477 Vac (full load), 242-305 Vac (55%~100% load)		
	Current Harmonic Distortion	<3% *		
	Power Factor	> 0.99		
	Frequency	45~65Hz		
Output	Voltage	380/220V, 400/230V, 415/240V (3 phase, 4-wire +G)		
	Output Power Factor	1		
	Voltage Harmonic Distortion	≤ 2% (linear load)		
	Voltage Regulation	±1% (static)		
	Frequency	50/60 ± 0.05 Hz		
	Overload Capacity	≤ 125% : 10 minutes ; ≤ 150% : 1 minute		
Interface	Standard	System communication port x 1, LCM port x 1, Parallel port x 2, Smart slot x 2, Output dry contact x 6, Input dry contact x 2, Battery dry contact x 2, REPO		
Conformance	Safety	BSMI, CE, RCM		
Other	Features	Parallel Redundancy and Expansion Module and system redundancy ; Maximum 4 units		
	Emergency Power Off	Local and remote		
	Battery start	Yes		
	Event Log	3000 records		
Efficiency	AC-AC	Up to 96% (Tested by TÜV)		
	ECO Mode	99%		
Environment	Operating Temperature	0 ~ 40 °C		
	Relative Humidity	0 ~ 95% (non-condensing)		
	Audible Noise (at one meter)	< 62 dB		
	IP Protection	IP20		
Physical	Dimensions (WxDxH)	600 x 1090 x 2000 mm		
	WeightUPS System	310 kg320 kg		
				350 kg
	Power Module	32 kg	32 kg	32 kg
	Rack-mount PDC	32 kg	32 kg	N/A
	Battery Module	29.5 kg	N/A	N/A
System	Frame	25kW Power Module	3	6
Maximum	Capacity			8
	Rack-mount PDC	1	2	N/A
	Breaker Module (for Rack-mount PDC) 6		12	N/A
	Battery Module	4	N/A	N/A

\* When input vTHD is less than 1%.  
All specifications are subject to change without prior notice.



2007~2008 Forbes Asia's Fabulous 50



2009 Frost & Sullivan Green Excellence Award for Corporate Leadership



Delta's Manufacturing System is Certified by ISO 9001 and ISO 14001 Standards



IECQ Certificate of Hazardous Substance Process Management



# UPS Q&A

## Power issues

**Q** What are the power issues?

**A**

Based on a survey made by Contingency Planning, poor power quality is the key factor in computer data loss. In addition to black outs, other power quality problems are: voltage sag, spikes, voltage surges, noise, and voltage too low (high). These are the events that lead to damage and reduce the life of computer components as well as cause data loss and damage.

**Q** How can these power issues be solved?

**A**

There are quite a few methods for dealing with power problems. The three most commonly used are: a surge absorber, a regulator or a UPS.

Power issue	Solution		
	Surge absorber	Regulator	Online UPS
Black out	X	X	✓
Sag	X	▲	✓
Surge	▲	▲	✓
Noise	X	X	✓
Spike	▲	▲	✓
Frequency drift	X	X	✓

X: Cannot deal with

▲: Can partly deal with

✓: Can totally deal with

**Q** What is a voltage sag? What is its impact on computer equipment?

**A**

Voltage sag is the most common power problem we may encounter and it is responsible for 87% of all power issues. A voltage sag is a short period of voltage drop caused by some outside problem. This may result in operation failure of computer peripherals, such as the keyboard in minor cases, or it might lead to data loss and file damage in its more serious form. Voltage sag may also damage computer components and reduce their working lives.

## UPS Q&A

**Q** What is a spike? What is its impact on computer equipment?

**A**

A spike is a great increase in voltage of very short duration. In most cases it is generated by lightning in nearby regions. It may damage computer hardware or precision equipment and result in data loss.

**Q** What is a voltage surge? What is its impact on computer equipment?

**A**

When powering off high-current equipment or a group of high load equipment connected to a single power source, an inertial voltage surge may be generated during power transmission. Most computers or precision equipment feature a certain range of operational voltage that accommodates such a situation. However, if the voltage surge is greater than the tolerance settings, some equipment or components may be damaged and this can lead to equipment failure and a reduced working life.

**Q** What is noise? What is its impact on computer equipment?

**A**

A score of factors are responsible for noise, including lightning, the powering on or off of nearby equipment, generators, and even wireless communications. Noise may cause precision equipment or computers to fail or result in program runtime errors.



## Types of UPS

**Q** Why is a UPS needed?

**A**

Unsteady power quality can affect the normal operation of a computer. A UPS not only provides immediate power in case of blackout, but also provides stable and clean power under normal conditions. It improves the incoming power by regulation and filtration and also suppresses spikes caused by lightning. A UPS, is like a personal insurance policy and protects your computer equipment against power risks.

**Q** What kinds of UPS are there?

**A**

There are three types of UPS: Off-Line On-Line and Line-Interactive.

**Q** What is an Off-Line UPS?


**A**

Please refer to the off-line system diagram.

Equipment is powered by the grid directly through a bypass line. In the event of a power failure it is powered by AC current generated by an inverter run by a battery in the UPS.

### Features

1. When commercial power is normal, the UPS does nothing and the load is handled directly by the grid. This type does not improve grid power with respect to noise and surge suppression (filter typically used has low capacity).
2. Provides the least protection as a certain conversion time is needed.
3. Simple in structure, compact in size, light in weight, easy to control and not very expensive.

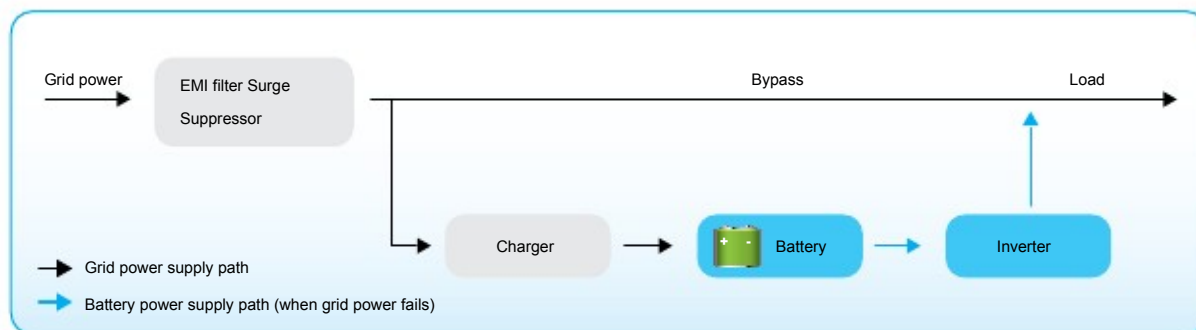



# UPS Q&A


## Q What is an On-Line UPS?

**A** Please refer to the On-line UPS diagram.

The on-line UPS supplies power to the load by output from the inverter and uses the bypass path only in a case where the UPS itself fails, is overloaded, or overheats.

### Features

1. Output power supply path (when grids of the best quality as it is processed by the UPS.
2. No conversion time is required.
3. Complex in structure and expensive.
4. Gives the highest protection and has excellent noise filtering and surge suppression capacity.

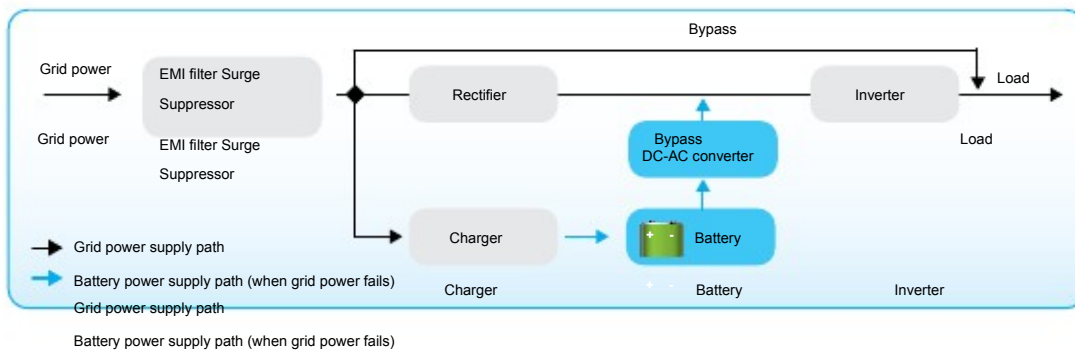


## Q What is a Line-Interactive UPS?

**A** Please refer to the line-interactive UPS diagram.

The line-interactive UPS supplies power to the load through the bypass with output from the inverter when grid power is normal. The inverter acts as a charger at this time. In the event of a black out, the inverter converts DC current from supply battery to AC for output to the load.

### Features

1. The bi-directional conversion design reduces the time required for charging the UPS battery.
2. Requires a certain conversion time.
3. The complex control mechanism makes it more expensive.
4. Has protection capacity between that of the on-line and off-line UPSs. It is less effective in noise filtering and surge suppression.

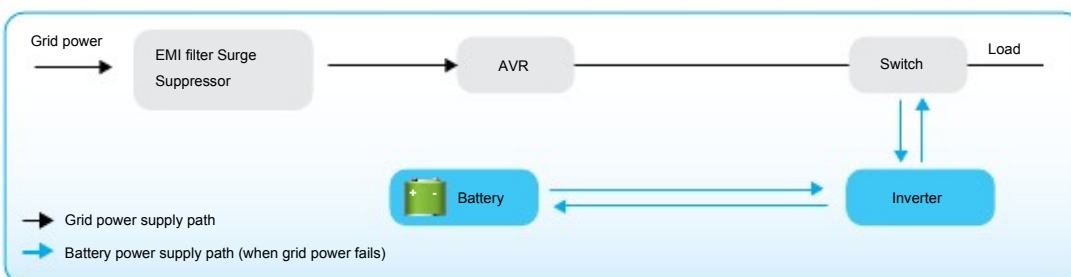

## Common battery problems

**Q** What kinds of batteries are used in a UPS?

**A**

Most commercially available UPS use VRLA batteries that are water-and maintenance-free. The energy is generated by chemical reactions in a paste-like electrolyte. For most consumers, these batteries are not only easy to use and maintain but also simple to replace when necessary.

**Q** What is the life cycle of a battery?

**A**

The power provided by a UPS comes from the discharge of its batteries. Batteries age not only with use and external factors but also from the internal chemical reactions. Batteries will still age even when not in use.

**Q** How should a battery be maintained?

**A**

Regular charging and discharging is very important for battery maintenance. You can regularly execute this function if your UPS has the battery test feature. Otherwise, you can simply unplug the input to your UPS to simulate a grid power black-out and check the time the battery takes to discharge. Please replace your batteries with new ones when the discharge time becomes less than that given in the specification. This will ensure that there is enough discharge time for the system to save files and be shut down in case of grid power failure.

**Q** How is the capacity of a UPS determined?

**A**

Most commercially available UPS now express their capacity as VA. V stands for voltage and A for current in amps. In short, VA equals the power and capacity of a UPS. For example, a UPS of 500VA capacity with an output of 110V will provide a maximum current of 4.55A and more than this will lead to overload. The unit of power can be expressed in Watts. While the Watt indicates active power, VA indicates apparent power and Watt equals VA multiplied by the power factor ( $VA \times pf = \text{Watt}$ ). There is no common criterion for power factor (pf). Generally a value of between 0.6 and 0.9 is acceptable while a value of 0.5 may represent poor design. Pay attention to this value when purchasing a UPS. A high power factor implies better utilization and more economical use of power.

**Q** Where can we have our batteries replaced?

**A**

Please contact the service center or your UPS dealer when you need to replace your batteries.

**Q** Where can an appropriate UPS be bought?

**A**

1. Learn about the applicability of each type of UPS.
2. Appraise your needs for power quality.
3. Learn the required UPS capacity and appraise the total capacity required for future expansion.
4. Select a market proven brand and supplier.
5. Purchase an appropriate UPS that is suitable for your requirements.

**Q** Is a UPS really needed in places with very few black-outs?

**A**

Statistics indicate that black-outs are a minor power issue. Other, not so obvious power issues, like over-voltage, under-voltage and surges are the major ones. In addition to providing extended power for long stretches, a UPS is designed to provide customers with critical total power protection against voltage drift, surges, high frequency interference, and any other kind of power failure and drift.

**Q** How long should the UPS provide power?

**A**

The single most important function of a UPS is to provide adequate backup power for the equipment load. The time a UPS should provide power should be long enough for users to finish running procedures in case of power failure. In general, 5 to 10 minutes should be enough. If longer than this is required, you can purchase a UPS that includes an external battery cabinet(s) that will increase the UPS backup time.

### **MSTECHNOLOGIES**

**Office: Plot No. : 64, HMT Hills Colony, Nearby Tulasi Nagar  
Community Hall, Kukatpally, Hyderabad-72  
Telangana, India Tel: +91-9010777780, 9603777780  
E-mail: mstsaleshyd@gmail.com, Website:  
www.mstechnologiesups.com**

## Europe

Czech Republic  
Delta Energy Systems  
(Czech Republic), spol.s r.o.  
Perucka 2482/7, 120 00 Praha 2,  
Czech Republic  
T +420 272 019 330  
E ups.czech.republic@deltaww.com

Finland  
Delta Energy Systems (Finland) Oy  
P.O. Box 63, Juvan teollisuuskatu 15, FIN-  
02921 Espoo, Finland  
T +358 9 84966 0  
E ups.finland@deltaww.com

France  
Delta Energy Systems (France) S.A.  
ZI du bois Chaland 2, 15 rue des Pyrénées,  
Lisses, 91056 Evry Cedex, France  
T +33 1 69 77 82 60  
E ups.france@deltaww.com

Germany  
Delta Energy Systems (Germany) GmbH  
Coesterweg 45, 59494 Soest, Germany  
T +49 2921 987 0  
E ups.germany@deltaww.com

The Netherlands -  
Headquarters  
Delta Electronics (Netherlands) BV  
Zandsteen 15, 2132MZ Hoofddorp,  
The Netherlands  
T +31 20 655 09 00  
E ups.netherlands@deltaww.com

Poland  
Delta Energy Systems (Poland) Sp. z o.o.  
23 Poleczki Str., 02-822 Warszawa,  
Poland  
T +48 22 335 26 00  
E ups.poland@deltaww.com

Russia  
Delta Energy Systems LLC  
Vereyskaya Plaza II, office 112, Vereyskaya  
str.17, 121357 Moscow, Russia  
T +7 495 644 3240  
E ups.russia@deltaww.com

Slovak Republic  
Delta Electronics (Slovakia) s.r.o.  
Botanicka 25/A, SK - 841 04 Bratislava,  
Slovakia  
T +421 2 6541 1258  
E ups.slovakia@deltaww.com

Switzerland  
Delta Energy Systems (Switzerland) AG  
Freiburgstrasse 251, 3018 Bern-Bümpliz,  
Switzerland  
T +41 31 998 53 11  
E ups.switzerland@deltaww.com

Spain  
Delta Energy Systems (Spain) S.L.  
Ctra. de Villaverde a Vallecas, 265 1º Dcha Ed.  
Hormigueras, 28031 - Madrid, Spain  
T +34 91223 7420  
E ups.spain@deltaww.com

Turkey  
Delta Greentech Electronic San. Ltd.  
Serifali Mevkii Barbaros Bulvari Soylesi Sok No  
19 Y.Dudullu-Umraniye/Istanbul, Turkey  
T +90 216 499 9910  
E ups.turkey@deltaww.com

United Kingdom  
Delta Electronics Europe Ltd.  
1 Redwood Court, Peel Park, Campus, East  
Kilbride, G74 5PF, United Kingdom  
T +44 1355 588 888  
E ups.united.kingdom@deltaww.com

EMEA

## Middle-East & Africa

South Africa  
Delta Energy Systems MEA (Switzerland) AG  
South Africa Representative Office  
Unit 305B, Lougardia Building, Cnr  
Embankment and Hendrik Verwoerd Drive,  
Centurion, 0157, South Africa  
T +27 12 663 2714  
E ups.south.africa@deltaww.com

United Arab Emirates  
Delta Energy Systems (Switzerland) AG  
Dubai Representative Office  
P.O. Box 185668  
Gate 7, 3rd Floor, Hamarain Centre, Dubai  
T +971 425 99 55 3  
E info.middle-east@deltaww.com

## Americas

Brazil  
Delta Greentech (Brasil) S/A  
Rua Itapeva, Nº 26 - 3º andar  
01332 000 - São Paulo - SP  
T +55 11 3568 3850  
E ups.brazil@deltaww.com

## Asia Pacific

China  
Delta GreenTech (China) Co., Ltd.  
238 Minxia Road, Pudong, Shanghai, 201209  
P.R.C  
T +86 21 5863 5678  
+86 21 5863 9595  
E ups.china@deltaww.com

India  
Delta Power Solutions (India) Pvt. Ltd.  
Plot No. 43, Sector-35, HSIIDC,  
Gurgaon-122001, Haryana, India  
T +91 124 4874 900  
E ups.india@deltaww.com

Taiwan  
Delta Electronics Inc.  
39 Section 2, Huandong Road,  
Shanhua Township  
Tainan County 74144, Taiwan  
T +886 6 505 6565  
E ups.taiwan@deltaww.com

Australia  
Delta Energy Systems Australia Pty Ltd.  
Unit 20-21, 45 Normanby Road, Notting  
Hill VIC 3168, Australia  
T +61 3 9543 3720  
E ups.australia@deltaww.com

Sydney office:  
Level 3 / 67-69 Epping Rd, North Ryde, NSW  
2113

Thailand  
Delta Electronics (Thailand) Public Co.,  
Ltd.  
909 Soi 9, Moo 4, E.P.Z., Bangpoo  
Industrial Estate, Tambon Prakasa,  
Amphur Muang-samutprakarn,  
Samutprakarn Province 10280, Thailand  
T +662 709-2800  
E ups.thailand@deltaww.com

Singapore